

Schottky Dual Diode

SBLB2030CT

30V / 20A

DATASHEET

from

www.web-bcs.com


OEM – General Semiconductor

Source: General Semiconductor Databook 1998

NEW PRODUCT NEW PRODUCT NEW PRODUCT

SBLB2030CT AND SBLB2040CT
SCHOTTKY RECTIFIER
Reverse Voltage - 30 and 40 Volts Forward Current - 20.0 Amperes

TO-263AB

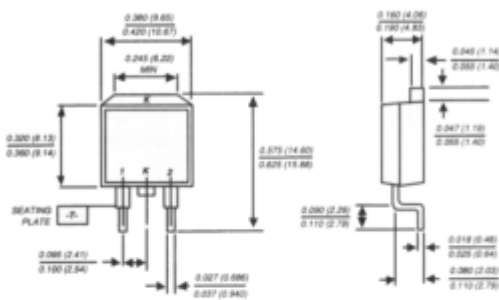

Dimensions in inches and (millimeters)

FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classifications 94V-0
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ High current capability, low forward voltage drop
- ◆ High surge capability
- ◆ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ◆ Dual rectifier construction, positive center-tap
- ◆ Guardring for overvoltage protection
- ◆ High temperature soldering guaranteed: 250°C/10 seconds, 0.17" (4.3mm) from case



MECHANICAL DATA

Case: JEDEC TO-263AB molded plastic
Terminals: Leads solderable per MIL-STD-750, Method 2026
Polarity: As marked
Mounting Position: Any
Mounting Torque: 5 in. - lbs.max.
Weight: 0.08 ounce, 2.24 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	SBLB2030CT	SBLB2040CT	UNITS
Maximum repetitive peak reverse voltage	VRRM	30	40	Volts
Maximum RMS voltage	VRMS	21	28	Volts
Maximum DC blocking voltage	VDC	30	40	Volts
Maximum average forward rectified current at T _C =105°C	I _(AV)	20.0		Amps
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	175.0		Amps
Peak repetitive reverse surge current (NOTE 3)	I _{RRM}	1.0		Amp
Maximum instantaneous forward voltage per leg at 10.0A (NOTE 1)	V _F	0.55		Volts
Maximum instantaneous current at rated DC blocking voltage per leg (NOTE 1)	I _R	1.0 50.0		mA
Typical thermal resistance per leg (NOTE 2)	R _{θJC}	2.0		°C/W
Operating junction and storage temperature range	T _J , T _{STG}	-40 to +125		°C

NOTES:
 (1) Pulse test: 300µs pulse width, 1% duty cycle
 (2) Thermal resistance from junction to case per leg
 (3) 2.0µs pulse width, f=1.0 KHz

RATINGS AND CHARACTERISTIC CURVES SBLB2030CT AND SBLB2040CT

