



## RFT SY196/0,5 ... 10 – SY197/0,5 ... 10

Schnelle Siliziumleistungsdiode im Metallgehäuse mit Gewindeanschluss M5 bzw. M6

Typ	$U_{RRM}$ (V)	$U_{RSM}$ (V)	$U_{RWM}$ (V)	$I_{F(AV)}$ (A)	$I_{FRM}$ (A)	$t_{RR}$ nS
SY196/0,5	50		35	15	220	0,3
SY196/1	100		70			
SY196/2	200		140			
SY196/4	400		280			
SY196/6	600		420			
SY196/8	800		560			
SY196/10	1000		700			
SY197/0,5	50		35	25	220	0,3
SY197/1	100		70			
Sy197/2	200		140			
SY197/4	400		280			
SY197/6	600		420			
SY197/8	800		560			
SY197/10	1000		700			

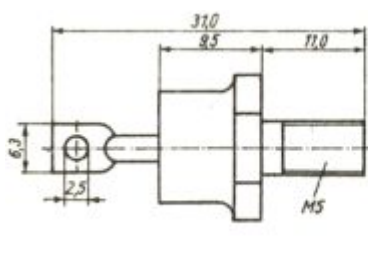

SY196/x

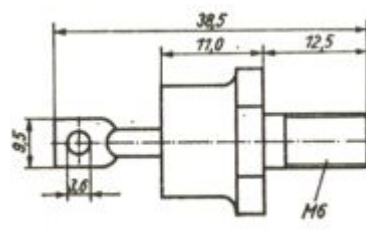

SY197/x



Quelle: Aktive elektronische Bauelemente – 1985, Datenbuch Mikroelektronik Gesamtübersicht